


HEAVY INDUSTRIAL SERIES CASTORS

With a higher load capacity of up to 500kg, this range has been developed with strength in mind.

These castors are often seen across logistics, road transport, manufacturing and display and exhibition services.

- Largest variety of wheel types
- 6mm thick steel construction
- Available with standard baseplate or M3 baseplate
- Available with brake, directional lock, or swivel lock & brake

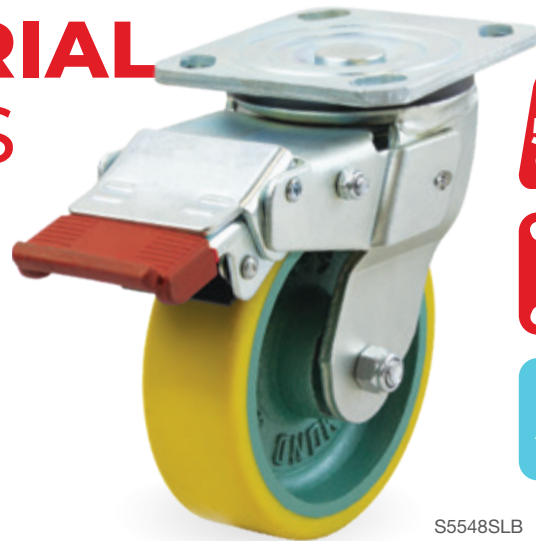

UP TO
500KG
CAPACITY

MOUNTING
PLATES
AVAILABLE
page 123

STAINLESS
MODELS
AVAILABLE
page 57

S5548SLB

										
Diameter (mm)	Width (mm)	Wheel Type	Wheel Code	Bearing Type	Load Capacity	Height (mm)	Swivel Radius	With Brake	Rigid Code	Swivel Code
100	35	Reb Rubber	RR4077	Ball	150	142	84	145	R4457	S4456
100	35	Reb Poly	RP4072	SS Roller	150	142	84	145	R4441	S4440
100	35	Poly Nylon	PU4408	Roller	250	142	84	145	R4438	S4437
100	38	Poly Ci	PU449	Ball	330	142	84	145	R4449	S4448
100	35	Nylon	NY401	Plain	300	142	84	145	R4434	S4433
100	35	Nylon	NY413	Ball	300	142	84	145	R4436	S4435
100	35	GF Nylon	GF412	Plain	200	142	84	145	R4455	S4454 *
100	40	High Temp Polymer	HT481	Plain	200	142	84	-	S4353	S4352 *
100	36	Aluminium	AL474	Bronze Bush	180	142	84	145	R4467	S4466 *
100	36	Aluminium	AL473	Oilless Du Bush	180	142	84	-	R4397	S4396 *
100	38	Cast Iron	Ci421	Plain	300	142	84	145	R4451	S4450 *
100	38	Cast Iron	Ci400	Ball	400	142	84	145	R4453	S4452
100	36	VG Cast Iron	VG459	Ball	280	142	84	-	R4444	S4443 *
100	50	VG Cast Iron	VG461	Roller	280	142	84	-	R4497	S4496 *
125	35	Reb Rubber	RR5077	Ball	200	165	100	145	R5545	S5544
125	35	Reb Poly	RP5072	SS Roller	200	165	100	145	R5441	S5440
125	35	Poly Nylon	PU5508	Roller	250	165	100	145	R5543	S5542
125	38	Poly Ci	PU549	Ball	330	165	100	145	R5549	S5548
125	35	Nylon	NY501	Plain	330	165	100	145	R5534	S5533
125	35	Nylon	NY513	Ball	330	165	100	145	R5536	S5535
125	38	Cast Iron	Ci532	Plain	380	165	100	145	R5551	S5550

Brake Options

B = Brake
D = Directional Lock

SLB = Swivel Lock & Brake

To order castors with Brake, Directional Lock or Swivel Lock & Brake add B, D or SLB to end of swivel code e.g. S5535SLB

HEAVY INDUSTRIAL SERIES CASTORS

**UP TO
500KG
CAPACITY**

**MOUNTING
PLATES
AVAILABLE
page 123**

**STAINLESS
MODELS
AVAILABLE
page 57**

 Diameter (mm)	 Width (mm)	 Wheel Type	 Wheel Code	 Bearing Type	 Load Capacity (kg)	 Height (mm)	 Swivel Radius (mm)	 With Brake (mm)	 Rigid Code	 Swivel Code
100	50	Rubber	RT4447	Roller	110	142	84	160	R4431	S4432
100	50	Poly Nylon	PU4409	Ball	250	142	84	160	R4411	S4410
100	50	Reb Rubber	RR4078	Ball	200	142	84	160	R4371	S4370
100	50	Poly Ci	PU424	Roller	250	142	84	160	R4401	S4400
100	50	Poly Ci	PU425	Ball	500	142	84	160	R4389	S4388
100	50	PolyAlu	PU436	Ball	150	142	84	160	R4373	S4372
100	50	Poly Alu	PU407	Ball	300	142	84	145	R4275	S4274
125	50	Rubber	RT5547	Roller	180	165	100	160	R5503	S5502
125	50	Reb Rubber	RR5078	Ball	200	165	100	160	R5371	S5370
125	50	Poly Nylon	PU5509	Ball	250	165	100	160	R5511	S5510
125	50	Poly Ci	PU524	Roller	250	165	100	160	R5531	S5530
125	50	Poly Ci	PU525	Ball	500	165	100	160	S5541	S5540
125	50	PolyAlu	PU536	Ball	200	165	100	160	R5373	S5372
125	50	Poly Alu	PU507	Ball	400	165	100	145	R5275	S5274
150	45	Reb Rubber	RR6677	Ball	225	190	124	160	R6631	S6632
150	50	Rubber	RT6642	Roller	225	190	124	160	R6641	S6640
150	50	Rubber	RT6647	Roller	225	190	124	160	R6603	S6602
150	50	Reb Poly	RP6072	SS Roller	300	190	124	160	R6441	S6440
150	50	Poly Nylon	PU6071	Ball	400	190	124	160	R6645	S6644
150	50	Poly Ci	PU614	Roller	250	190	124	160	R6656	S6655
150	50	Poly Ci	PU649	Ball	500	190	124	160	R6649	S6648
150	50	Nylon	NY652	Plain	400	190	124	160	R6634	S6633
150	50	Nylon	NY613	Ball	400	190	124	160	R6636	S6635
150	50	GF Nylon	GF652	Plain	400	190	124	160	R6625	S6624 *
150	50	VG Cast Iron	VG661	Roller	400	190	124	160	R6697	S6696 *
150	45	Cast Iron	Ci611	Plain	500	190	124	160	R6651	S6650
150	45	Cast Iron	Ci601	Ball	500	190	124	160	R6653	S6652
150	50	PolyAlu	PU636	Ball	200	190	124	160	R6627	S6626
150	50	Poly Alu	PU607	Ball	500	190	124	160	R6275	S6274



S5530



S6632SLB



S6274

* indicates castors not available with brake



indicates castors suitable for high/low temperature applications.

HEAVY INDUSTRIAL SERIES CASTORS

**UP TO
600KG
CAPACITY**

**MOUNTING
PLATES
AVAILABLE
page 123**

**STAINLESS
MODELS
AVAILABLE
page 57**



S8851




R8850




S8855

 Diameter (mm)	 Width (mm)	 Wheel Type	 Wheel Code	 Bearing Type	 Load Capacity (kg)	 Height (mm)	 Swivel Radius (mm)	 With Brake (mm)	 Rigid Code	 Swivel Code
200	45	Reb Rubber	RR8871	Ball	250	241	156	160	R8831	S8832
200	35	Rubber	RN8875	Roller	200	241	156	160	R8873	S8872
200	50	Rubber	RT8842	Roller	250	241	156	160	R8841	S8840
200	50	Rubber	RT8847	Roller	250	241	156	160	R8803	S8802
200	50	Poly Nylon	PU8071	Ball	400	241	156	160	R8850	S8849
200	50	Poly Ci	PU849	Ball	500	241	156	160	R8852	S8851
200	50	Nylon	NY800	Plain	400	241	156	160	R8844	S8843
200	50	Cast Iron	CI842	Plain	380	241	156	160	R8854	S8853
200	50	Cast Iron	CI852	Ball	500	241	156	160	R8856	S8855
200	50	Nylon	NY830	Ball	400	241	156	160	R8846	S8845
200	50	PolyAlu	PU815	Ball	250	241	156	160	R8825	S8824
200	50	Poly Alu	PU807	Ball	500	241	156	160	R8275	S8274



Baseplate dimensions and
drilling patterns for Heavy
Industrial series castors



Available with a standard
baseplate or M3 (Metric)
baseplate